

06-15-00

A

PATENT

Attorney Docket No. ESLABS.003A

Date: June 13, 2000

Page 1

06/13/00
jc821 U.S. PTO

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): **Timothy R. Knowles and Christopher L. Seaman**For: **THERMAL INTERFACE**

Enclosed are:


- (X) 7 sheet(s) of drawings.
- (X) Return prepaid postcard.

jc851 U.S. PTO
09/593587
06/13/00

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$345	\$345
Total Claims	17 - 20 =	0 ×	\$9	\$0
Independent Claims	6 - 3 =	3 ×	\$39	\$117
If application contains any multiple dependent claims(s), then add			\$130	\$0
FILING FEE TO BE PAID AT A LATER DATE		\$462		

- (X) Please use Customer No. 20,995 for the correspondence address.


 Thomas R. Arno
 Registration No. 40,490
 Attorney of Record

S:\DOCS\TRA\TRA-3647.DOC
 061300

KNOBBE, MARTENS, OLSON & BEAR

A LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS

PATENT, TRADEMARK AND COPYRIGHT CAUSES

501 WEST BROADWAY

SUITE 1400

SAN DIEGO, CALIFORNIA 92101-3505

(619) 235-8550

FAX (619) 235-0176

INTERNET WWW.KNOB.COM

JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH.D.
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH.D.
TIRZAH ABE LOWE
GEOFFREY Y. IIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
JAMES W. HILL, M.D.
ROSE M. THIESSEN, PH.D.
MICHAEL L. FULLER
MICHAEL A. GUILIANA
MARK J. KERTZ
RABINDER N. NARULA
BRUCE S. ITCHKAWITZ, PH.D.
PETER M. MIDGLEY
THOMAS S. MCCLENAHAN
MICHAEL S. OKAMOTO
JOHN M. GROVER
MALLARY K. DE MERLIER
IRFAN A. LATIEF
AMY C. CHRISTENSEN
SHARON S. NG
MARK J. GALLAGHER, PH.D.
DAVID G. JANKOWSKI, PH.D.
BRIAN C. HORNE
PAYSON J. LEWILLEUR
WILLIAM G. BERRY
DIANA W. PRINCE

OF COUNSEL
JERRY R. SEILERJAPANESE PATENT ATTY
KATSUHIRO ARAI**EUROPEAN PATENT ATTY
MARTIN HELLEBRANDTKOREAN PATENT ATTY
MINCHEOL KIMSCIENTISTS & ENGINEERS
(NON-LAWYERS)

RAIMOND J. SALENIEKS**
NEIL S. BARTFELD, PH.D.
DANIEL E. JOHNSON, PH.D.**
JEFFERY KOEPKE, PH.D.**
KHURRAM RAHMAN, PH.D.
JENNIFER A. HAYNES, PH.D.
BRENDAN P. O'NEILL, PH.D.
THOMAS Y. NAGATA
LINDA H. LIU
YASHWANT VAISHNAV, PH.D.
MEGUMI TANAKA
CHE S. CHERESKIN, PH.D.**
JASON I. SAATHOFF
ERIK W. ARCHBOLD
PHILIP C. HARTSTEIN
JULIE A. HOPPER
CHRIS S. CASTLE
JAMES W. AUSLEY

* A PROFESSIONAL CORPORATION
† ALSO BARRISTER AT LAW (U.K.)
** U.S. PATENT AGENT

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : ESLABS.003A

Applicant(s) : Timothy R. Knowles and Christopher L. Seaman

For : THERMAL INTERFACE

Attorney : Thomas R. Arno


"Express Mail"
Mailing Label No. : EL631158243US

Date of Deposit : June 13, 2000

I hereby certify that the accompanying

Transmittal Letter; Specification in 19 pages; 7 sheets of drawings; Return
Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

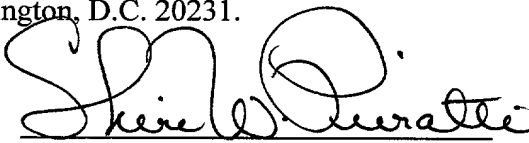
Sheri W. Pieratti

S:\DOCS\TRA\TRA-3648.DOC
061300

201 CALIFORNIA STREET
SUITE 1150
SAN FRANCISCO, CALIFORNIA 94111
(415) 954-4114
FAX (415) 954-4111

620 NEWPORT CENTER DRIVE
SIXTEENTH FLOOR
NEWPORT BEACH, CALIFORNIA 92660
(949) 760-0404
FAX (949) 760-9502

3801 UNIVERSITY AVENUE
SUITE 710
RIVERSIDE, CALIFORNIA 92501
(909) 781-9231
FAX (909) 781-4507

1875 CENTURY PARK EAST
SUITE 600
LOS ANGELES, CALIFORNIA 90067
(310) 407-5484
FAX (310) 407-5485

THERMAL INTERFACECross Reference to Related Applications

5 This application claims priority to U.S. Provisional Patent Application Serial No. 60/139,443, entitled Thermal Interface, and filed on June 14, 1999. The entire disclosure and content of application Serial No. 60/139,443 is hereby incorporated by reference in its entirety.

BackgroundField

10 The invention relates to heat transfer interfaces such as gaskets that provide a path for heat transfer between two surfaces.

Description of Related Art

15 Much of thermal management involves the transfer of heat from one element, such as electronic components, boards and boxes, heatpipes, radiators, heat spreaders, etc. to another. Of major concern in this process is the thermal contact resistance of the interface between the two components. While individual components might have very high conductance, large temperature drops (ΔT 's) can develop at high resistance interfaces, limiting overall performance of the thermal control system. The entire thermal management system can be greatly improved by using thermal interfaces with
20 lower resistance. Smaller ΔT 's can result in weight reduction, better performance, and longer lifetimes of electronic elements (e.g. batteries).

Existing methods of thermal attachment include bonding (brazing, soldering, adhesives, tapes) or bolting/clamping, often with a filler such as a thermal gasket or grease. The ideal interface will fill the gaps between the two elements with high
25 thermal conductivity material. It will be compliant so that only a minimal amount of pressure is required for intimate contact, precluding the need for heavy bolts or clamping mechanism, and eliminating the necessity of flat, smooth mating surfaces. Furthermore, it will not fail under stresses induced by thermal expansion mismatch.

30 Conventional thermal gaskets consist of small, roughly spherical particles (e.g. alumina, BN, Ag) suspended in a compliant polymeric media such as silicone. Although each particle has high thermal conductivity, the interface between the particles

has low conductance. The effective κ of the composite is limited by these numerous interfaces and the highest κ achieved is of the order of only a few W/mK.

As an alternative to the above described thermal interface material such as thermal greases, arrays of substantially parallel carbon fibers has been used. Some example systems of this type are provided by U.S. Patent Nos. 5,077,637 to Martorana et al., 5,224,030 and 5,316,080 to Banks et al., and 4,849,858 and 4,867,235 to Grapes et al. The disclosures of each of these five patents are hereby incorporated by reference herein in their entireties.

Although carbon fiber based gaskets have increased thermal conductance over many other alternatives, their promise has not been realized, and further improvements to the efficiency of heat transfer for these types of gaskets is needed.

Summary

In one embodiment, the invention comprises a thermal interface including a first surface, a second surface, and a plurality of elongate fibers in the space between and in contact with at least one of the first and second surfaces. At least some of the fibers have a cross sectional diameter of less than approximately 1 micron. In some specific embodiments, the fibers extend from one or both sides of a metal membrane. In another specific embodiment, the fibers having a cross sectional diameter of less than about 1 micron are bonded to a portion of other fibers having a cross sectional diameter of greater than approximately 3 microns.

In another embodiment of the invention, a method of transferring heat away from a heat source comprises transferring heat from the heat source to a first plurality of fibers having cross sectional diameters of less than about 1 micron, transferring heat from the first plurality of fibers to a second plurality of fibers having cross sectional diameters of more than about 3 microns, and transferring heat from the second plurality of fibers to a heat sink.

In yet another embodiment, a thermally conductive gasket comprises a plurality of fibers having first and second ends, the fibers being predominantly aligned such that the first ends are positioned adjacent to a first face of the gasket and such that the second ends are positioned adjacent to a second face of the gasket. A material is located predominantly proximate to the first ends, with the material improving heat transfer

between the first ends and a device in contact with the first face. The material may comprise nanofibrils.

Brief Description of the Drawings

FIG. 1A is a side view of one embodiment of a thermally conductive gasket incorporating nanofibrils.

FIG. 1B is a side view of another embodiment of a thermally conductive gasket incorporating nanofibrils.

FIG. 2 is a perspective view of a carbon fiber having a nanofibrils attached to the tip.

FIG. 3A is a scanning electron microscope image of a 7 micron diameter fiber with a mop of nanofibrils attached to the tip.

FIG. 3B is an increased magnification of the fiber of FIG. 3A.

FIG. 4 is a scanning electron microscope image of a mop of nanofibrils which has been mechanically compressed.

FIG. 5 is a scanning electron microscope image of the tips of the fibers of a thermal gasket prior to the deposition of nanofibrils.

FIG. 6A is a scanning electron microscope image the tip of one fiber of the gasket of Figure 5 after lapping.

FIG. 6B is a scanning electron microscope image the tip of one fiber of the gasket of Figure 5 after lapping and carbon CVD deposition.

FIG. 6C is a scanning electron microscope image the tip of one fiber of the gasket of Figure 5 after lapping, carbon CVD deposition, and nanofibril deposition.

FIG. 6D is a higher magnification of the nanofibril mop of Figure 6C.

Detailed Description

Embodiments of the invention will now be described with reference to the accompanying Figures, wherein like numerals refer to like elements throughout. The terminology used in the description presented herein is not intended to be interpreted in any limited or restrictive manner, simply because it is being utilized in conjunction with a detailed description of certain specific embodiments of the invention. Furthermore, embodiments of the invention may include several novel features, no single one of which is solely responsible for its desirable attributes or which is essential to practicing

the inventions herein described.

The inventions described herein relate to materials and associated devices that transfer heat from one device to another. A compliant thermal interface material developed by the applicant, which is presently marketed as VEL-THERM, is superior to existing commercial thermal interface gaskets. This material is a soft, carbon fiber velvet consisting of numerous high- κ (as high as 1000 W/mK) carbon fibers aligned perpendicularly to the interface plane. In some embodiments, such a “brush” of predominantly aligned carbon fibers is embedded in an adhesive substrate such that the tips of the fibers are attached to the surface of the substrate at one end, and are exposed at the other end. Free-standing “interleaf” gaskets can also be fabricated. These have fiber tips on both major surfaces, and the fibers are held together with an encapsulant such as a silicone or epoxy material.

Commercially available carbon fibers are formed from either pitch or PAN precursor material and drawn onto fiber tow. Each fiber typically has diameter $\sim 10\ \mu\text{m}$, but which may vary between approximately 3 and 15 microns. Pitch fibers are graphitized by heating to high temperatures (near 3000°C), giving them high thermal conductivities $\kappa \sim 1000\ \text{W/mK}$.

When placed between two surfaces, each fiber provides a high thermal conductivity path from one surface to the other. For uneven gaps, each fiber can bend independently in order to span the local gap. Low pressures are necessary to allow each fiber to touch both surfaces. Contact is maintained by either clamping or pressing the fiber tips into adhesive and bonding in place. By using high- κ fibers oriented in the direction of heat flow, such gaskets have a high κ (as high as 200 W/mK), while at the same time being even more compliant than conventional, particle-filled gaskets. Such velvet gaskets also work better than copper foil (at comparable pressures) because they provide a greater area of contact, conforming to uneven surfaces.

Many configurations are possible depending on the application requirements. Thus, the velvet can be bonded to one or both surfaces with various adhesives or PSA “tapes” including metal foils. The highest measured total thermal conductance has been

achieved by a high- κ carbon fiber interleaf “gasket” in which the fibers are encapsulated in a silicone gel encapsulant.

The total thermal resistance of a thermal gasket interface is the sum of three contributions: the resistance of the bulk material itself, and the resistances of each interface where the material comes in contact with the interfacing surface. In terms of conductance (inverse of resistance) this may be written as:

$$h_{total}^{-1} = h_{bulk}^{-1} + h_{interface1}^{-1} + h_{interface2}^{-1}$$

In some embodiments, $h_{bulk} = \kappa_{bulk}/t = 400,000 \text{ W/m}^2\text{K}$, which is 40 x higher than h_{total} . Thus, the total joint resistance is dominated by the contact resistance between the fiber tips and the contacting surfaces. Each interface has $h_{interface} \sim 20,000 \text{ W/m}^2\text{K}$. If the contact conductance is increased to values comparable to the bulk conductance, the total conductance of the interface can be dramatically improved.

To improve this contact conductance, some embodiments of the invention utilize very small diameter fibers having diameters less than about 1 micron either in conjunction with, or as an alternative to, the typically 3-15 micron diameter conventional carbon fibers. These small diameter fibers are referred to herein as nanofibrils or whiskers. Conventional carbon and silica whiskers may be utilized. Conventional carbon whiskers may be grown from a Ni or Fe catalyst by CVD processing. However, they have typically relatively large diameters of $\sim 1 \text{ }\mu\text{m}$. Furthermore, in order for conventional carbon whiskers to have high κ , they must be graphitized by heating to $\sim 3000^\circ\text{C}$.

In some advantageous embodiments of the invention, the whiskers comprise single or multi-walled carbon “nanotubes”. A nanotube is a recently discovered form of carbon that is basically an elongated version of a C_{60} molecule, also known as a Buckminster Fullerene, and commonly referred to as a “Buckyball”. A single-walled nanotube consists of a rolled graphene sheet, forming a tube of diameter 1.4 nm, and capped at each end. Nanotubes display many interesting and useful properties including very high thermal conductivity and high stiffness. They are highly robust; they elastically buckle, rather than fracture or plastically deform, when bent to large angles. Multiwalled nanotubes, which have larger diameters of up to about 500 nanometers, can

also be grown, with similar properties. These properties make both single and multi-walled nanotubes surprisingly useful as components of thermal interfaces. Their thermal conductivity provides excellent heat transfer characteristics, and their mechanical properties provide the capacity to form large areas of compliant contact with adjacent surfaces.

One embodiment of a thermal interface constructed in accordance with these principles is illustrated in Figures 1A and 1B. Referring now to Figure 1A, the thermal interface comprises a base 20 which has extending therefrom an array of nanofibrils 22 having diameters of less than about 1 micron. Figure 1B illustrates a two sided nanofibril gasket. In this embodiment, the base 24 forms a central support, nanofibrils 26, 28 extend in opposite directions from both major surfaces. The central support 24 or base 20 may, for example, be about 1 to 20 or mils thick, depending on the desired mechanical properties.

Several methods of growing arrays of nanofibrils/whiskers on substrate surfaces are known in the art. Chemical vapor deposition techniques have been used to grow relatively aligned nanotubes on nickel and nickel coated glass substrates as reported in Ren, et al., *Science*, Volume 282, pages 1105-1107 (November 6, 1998) and in Huang et al., *Applied Physics Letters*, Volume 73, Number 26, pages 3845-3847 (December 28, 1998), the disclosures of which are hereby incorporated by reference in their entireties. Ren et al. used a plasma-enhanced chemical vapor deposition (PECVD) process in which the nanotubes grew from a nickel film catalyst in the presence of acetylene (C_2H_2), ammonia (NH_3), and nitrogen (N_2) at temperatures less than $666^\circ C$. Multiwalled nanotubes with diameters from 20 – 400 nm and lengths from 0.1 – 50 μm were obtained. Thicker Ni films resulted in larger diameter nanotubes. Transmission electron microscopy (TEM) images showed that the nanotubes were multiwalled, centrally hollow tubes, not solid fiber. Each wall is presumed to be a highly thermally conductive graphitic layer. Key to their success seems to be the introduction of ammonia, which Ren et al. conjectured participated with the nickel in the catalytic reaction. The plasma enables growth at lower temperatures. The electric field of the plasma may also play a role in forming the nanotube array.

we may use Fourier's law of heat conduction. The conductance through the bottom of the fiber is then $q/\Delta T = \kappa\delta$.

The thermal conductance through a medium of conductivity κ between an isothermal flat surface and an isothermal vertical cylinder of length L and diameter D may be approximated as:

$$q/\Delta T = \kappa \frac{2\pi L}{\ln(4L/D)}, \text{ if } D/L \ll 1.$$

We take the effective length to be about the average interfiber distance $L \sim D \phi^{-1/2}$, where ϕ is the fiber packing fraction. The total thermal conductance per unit area of one of the interfaces of a velvet is then approximated as:

$$h_{\text{interface}} = \frac{2\kappa\phi}{D} \left(1 + \frac{4L/D}{\ln(4L/D)} \right) \sim \frac{2\kappa\phi}{D} \left(1 + \frac{4\phi^{-1/2}}{\ln(4\phi^{-1/2})} \right)$$

The second term dominates; that is, most of the heat conducts from the sides of the fiber near the tip through the conducting medium to the flat surface. For $\phi = 20\%$, $h_{\text{interface}} \sim 12\phi\kappa/D \sim 6000 \text{ W/m}^2\text{K}$ for air ($\kappa = 0.025 \text{ W/mK}$) and $\sim 24,000 \text{ W/m}^2\text{K}$ for silicone encapsulant ($\kappa = 0.1 \text{ W/mK}$).

Thus, a fiber tip enhanced with a nanofibril or whisker array would fill the gap with a medium with a higher effective κ , thereby improving $h_{\text{interface}}$. This may be accomplished in a variety of ways. In one embodiment, an unaligned discontinuous powder of nanofibrils is used to coat the tip region of the large fiber velvet. These powders are commercially available as, for example, type Pyrograf III whiskers from Applied Sciences, Inc. This material is a powder of cut whiskers with diameters of about 50-300 nanometers and lengths of about 20 to 80 microns. The nanofibril powder may be used as filler for thermally conductive grease, for example, which is applied to the tips of the velvet fibers. Alternatively, the powder is placed directly on the tips by soaking them in a solution of Pyrograf III in ethanol. The solution is advantageously ultrasonically vibrated to better disperse and disentangle the whiskers. After application, the presence of the nanofibrils in the tip region of the larger fibers improves heat

transfer at the interface between the larger fiber tips and the surface of the component the tips are in contact with.

Because the nanofibril powder is not an aligned array of nanofibrils, there are many inter fibril interfaces which still interfere with efficient heat transfer. Thermal conductance will be improved further if the nanofibrils formed a more ordered array with the nanofibrils spanning the gap between the tip of the larger diameter fiber and the component surface from end to end. This is shown conceptually in Figure 2. As shown in this Figure, a mop of nanofibrils 36 is attached to the tip portion of a larger diameter fiber 38. The nanofibrils 36 preferably extend predominantly away from the larger diameter fiber 38 and toward the component surface 40. In this embodiment, the nanofibrils may be configured to span the gap between each fiber and the mating surface, forming a high conductivity ($\kappa \sim 200$ W/mK), soft mop that effectively thermally shorts out the resistive gap. Although heat transfer efficiency between the tip of the larger fiber 38 and the component surface 40, may be expected to be better with better nanofibril alignment, even relatively poorly aligned masses of nanofibrils may be used to improve fiber tip heat transfer performance.

In one set of gasket fabrication procedures performed by the inventors, nanofibrils were formed onto larger diameter fibers and fiber velvets. In these procedures a CVD apparatus comprising a stainless steel (SS) vacuum chamber was utilized. In this chamber, a controlled gas mixture of ammonia and hydrocarbon (propylene or acetylene) flows down through a SS tube from the top, fills the chamber, and is pumped from the bottom with a mechanical pump. The gas flow is controlled and monitored with MKS mass flow controllers. The pressure is controlled by a needle valve above the pump and monitored with a MKS Baratron gauge. A quartz window allows visual monitoring of the experiment.

The plasma is sustained between two 2"-diameter, graphite electrodes. The bottom electrode is mounted on a ceramic (mullite) tube. A SS-sheathed thermocouple runs up the inside of the tube in order to monitor the temperature of the bottom electrode. The top electrode is mounted to the SS gas inlet tube; its height can be adjusted to control the gap. The bottom electrode (anode) is grounded through the thermocouple sheath. The top electrode (cathode) is electrically isolated from the

chamber and carries the (negative) high voltage, powered by a 1 kW DC power supply capable of 1000V/1A.

A hot filament is used for three purposes: (1) thermal nonequilibrium heating of the sample (2) emission of electrons to stabilize the glow discharge and prevent arcing (3) cracking of the hydrocarbon gas. Tungsten wire, 15 mil diameter, is wound into a coil and mounted between the electrodes. The support and electrical connections are made through an electrical feedthrough in the back. The filament is powered through an isolation transformer at 60 Hz. In the later CVD runs, the W coil was prevented from “drooping” when heated by supporting the coil with an alumina tube running through it, thus allowing better control of its position. Typical power applied through the coil was 200 W.

In a typical procedure, the sample, including substrate and catalyst coating, is placed on the bottom electrode. The chamber is sealed and leak tested with a He leak detector with a mass spectrometer. A gas flow of 160 sccm ammonia is established with a pressure of a few torr. An ammonia plasma is initiated between the electrodes and the tungsten filament is heated to $\sim 1500^{\circ}\text{C}$, as monitored by an optical pyrometer. The filament radiatively heats the sample. The temperature of the anode is monitored, although the sample is hotter than this. The sample is heated and etched for 10 – 15 mins. Then 80 sccm of hydrocarbon gas (propylene or acetylene) is introduced to start the CVD deposition, i.e. growth of carbon nanofibrils. After ~ 5 mins, the deposition is ceased and the chamber allowed to cool, after which the sample is removed and examined.

Dozens of PE-HF CVD runs have been performed using the techniques described by Ren et al. and Huang et al. set forth above using a number of substrates including commercially available nickel coated carbon fibers, as well as nickel coated pitch and PAN carbon fiber velvet gaskets. Figures 3A and 3B illustrate nanofibril “mops” grown onto nickel coated 7 micron diameter carbon fibers. These nanofibrils appear to be similar in structure to commercial vapor grown carbon fibers comprising tubes of concentric, graphitic layers. However, they tend to have a high defect density, exemplified by their not being straight, and causing them to have a lower thermal conductivity than ideal. The κ of these nanofibrils has not been measured, but

they are most likely graphitizable, and if necessary, heat treatment at 2800°C would likely give them a κ of ~2000 W/mK.

Under an optical microscope, one of the “befuzzed” fibers was singled out for investigating how the nanotube mop responds to pressure exerted by a surface with which it comes into contact. The befuzzed fiber tip was contacted with flat-bladed tweezers with enough force to bend the fiber, as observed under the optical microscope. The sample was then placed in the SEM to examine the effect. Shown in Figure 4 is an SEM image of the pressed befuzzed fiber tip. Although the diameter of the fiber is only 7 μm , the diameter of the befuzzed fiber is approximately 40 μm . Although a bit flattened, the mop can still be seen around the fiber tip, indicating some degree of mechanical resilience.

In another set of fabrication procedures, high thermal conductivity gaskets were made out of high- κ (~1000 W/mK), pitch carbon fibers (~10 micron diameter). The fibers are preferentially aligned in the z-direction such that each fiber spans the entire thickness of 1 mm. The fibers are held together with a light, epoxy wash coat. Capillary forces cause the epoxy to collect at the nodes where fibers contact each other. The packing fraction of fibers is about 10 %, which implies a theoretical bulk thermal conductivity value of $\kappa \sim 100$ W/mK and a bulk conductance of $h \sim 100,000$ W/m²K.

Gaskets of a high- κ velvet (100 W/mK) attached to a POCO carbon substrate may be made by electroflocking high- κ (generally about 100-1000 W/mK) pitch fibers (for example, 10 micron diameter x 0.5 mm length) into high- κ (~2 W/mK) carbonizable polymer such as polyimide. Electroflocking is a known technique for forming aligned fiber arrays. Pneumatic or mechanical flocking techniques may also be used. A variety of carbon fiber types may also be utilized, such as are commercially available from Amoco Corp. or Toray. A nickel film is ion beam sputtered into the velvet, most notably on the fiber tips. Carbon whisker arrays are then grown on the nickel coated fibers via PECVD processing.

The carbon fibers are precision cut from a continuous spool. Although the mean length of the pitch fibers will be controlled (typically 0.5 mm), there is some variation in length of 50 micron or more, which is comparable to the average distance between

adjacent fibers. A few psi pressure is required to bend the longer fibers so that the tips of the shorter fibers contact the interfacing surface. In some embodiments, the velvet samples may be lapped and polished before deposition of the Ni film so that the fiber tips are more coplanar (within a few microns). This can be accomplished by EDM cutting or by potting the velvet in a removable medium and then lapping and polishing it flat. The potting medium is then removed.

Coplanar tips may allow the "whiskerized" velvets to have high conductivity using less than 1 psi pressure since there is no need to compress the velvet in order for all of the tips to contact the interfacing surface. Coplanar tips may also have an effect on the quality or uniformity of the whisker arrays on the tips.

In one specific process, six gaskets were potted in a removable polymer and lapped on both sides with fine sandpaper (600 grit). The potting medium was then removed. These gaskets were processed in a carbon CVD reactor in order to carbonize the epoxy wash coat and deposit a thin carbon CVD layer (~2 micron-thick) that would hold the fibers together. The resulting gaskets are then able to withstand the PE-HF CVD process. A 55 ± 5 nm-thick film of Ni catalyst was ion-beam sputtered onto both sides of four of the carbon CVD'ed gaskets.

EXAMPLE

Pitch carbon fiber gasket sample cs7-144 was processed in the PE-HF CVD reactor under the conditions listed in Table 1

Table 1. PE-HF CVD deposition conditions of pitch fiber gasket sample

Sample#	cs7-144
Mounting conditions	Lying flat on anode
Plasma power	160 W
HF power	300 W
Max temperature	527°C
Plasma etch time	12 min
Deposition time	5 min
Hydrocarbon gas	Acetylene
Mass gain	4.6 mg (5 %)
Resulting deposit	Heavy, bottom side

After the chamber cooled, the sample was removed and examined under the microscope. The bottom of Sample cs7-144 was covered with carbon deposit that was visible under the optical microscope. The 90.5 mg sample had gained 4.6 mg, which corresponds to a 4 micron-thick, uniform layer of carbon over one surface. Some areas displayed thicker deposits than others. The variation may reflect variation in local temperature, hydrocarbon concentration, and/or catalyst microstructure.

Figure 5 is a 250x SEM image of a pitch carbon fiber gasket, looking from above, prior to the deposit of nanofibrils to the larger diameter fibers. The preferential alignment of the fibers is evident. Figures 6A-6C show the tip of a single pitch fiber of Sample cs7-144 after various processing steps, Figure 6A after lapping, Figure 6B after carbon CVD, and Figure 6C after PE-HF CVD. Many of the pitch fibers form a “pac-man”-shaped cross section during their manufacture. The fibers are remarkably flat after lapping. The carbon CVD deposited a uniform layer of $\sim 2 \mu\text{m}$ of carbon, increasing the diameter of each fiber from $\sim 12 \mu\text{m}$ to $\sim 16 \mu\text{m}$. It also formed a nodular structure at the tip which is no longer flat. In Figure 6C, it is seen that the PE-HF CVD did indeed deposit an array of carbon nanofibrils on the tips and along the shafts of the fibers. Figure 6D shows an x10k view of the nanofibrils. They are not straight, but form a “mop” which appears to be highly packed. The nanofibril diameters are on the order of 100 nm.

Another means of enhancing the conductance at the tips is to add phase change material (PCM) at and around the tips. Thermally-conductive PCM is commercially available from several vendors. It is typically sold in sheet form with thicknesses from 1 to several mils. It consists of a wax (high molecular weight hydrocarbon), filled with thermally conductive solid particles such as BN, alumina, diamond, silver flake, etc. As described above with reference to thermal grease, the phase change material may also include cut carbon nanofibrils. These particles typically have characteristic sizes from 1 to several microns. In addition, there may be wetting agents added so that the wax wets the particles, as well as the tips of the fibers.

Useful PCM is a solid at room temperature, and softens and melts at elevated temperatures. It may or may not be molten at operating temperatures. The PCM sheet

is typically supported by release liner paper that is eventually peeled away before application. In some advantageous embodiments, the melting point of the material is between about 30 degrees C and 100 degrees C. In some cases, the melting point is between about 40 degrees C and 70 degree C.

5 The PCM can be added to the fiber tips by a number of methods. The fibers can be flocked into a sheet of PCM that is heated to just the right temperature so that the tips of the flocked fibers adhere to it and remain vertically oriented. The fibers can then be anchored to the PCM sheet by melting the PCM further and/or pushing the fiber tips further into the PCM. The resulting velvet may or may not then be partially
10 encapsulated with silicone gel, PCM, acrylic spray, foam, or other means of encapsulation. The purpose of encapsulation is to (1) hold the fibers together, providing structural support, and (2) preventing fibers from escaping as potentially harmful debris. The latter is of special concern if the fibers are electrically conductive. Next, a PCM sheet can be placed on top of the resulting velvet, and the entire PCM/velvet/PCM sandwich pressed together and/or heated to fuse everything together.
15

This material has several advantages over the use of thermal grease and elastomer potted velvets. Similar to grease, high thermal conductivity PCM improves interface conductance. However, the PCM may be localized preferentially near the tips. This makes gasket very compliant, unlike velvet that is totally filled with elastomer.
20 Furthermore, solid PCM is not messy at room temperature like thermal grease, it supports velvet at room temperature when in solid form, and PCM acts as an adhesive that prevents fibers from escaping as debris.

In accordance with the above, thermal interface gaskets that have overall thermal conductance higher than commercially available gaskets may be produced. These
25 gaskets may also be ultra compliant, able to conform to non-flat or rough surfaces with a minimal amount of applied pressure.

The foregoing description details certain embodiments of the invention. It will be appreciated, however, that no matter how detailed the foregoing appears in text, the invention can be practiced in many ways. As is also stated above, it should be noted that
30 the use of particular terminology when describing certain features or aspects of the invention should not be taken to imply that the terminology is being re-defined herein to

be restricted to including any specific characteristics of the features or aspects of the invention with which that terminology is associated. The scope of the invention should therefore be construed in accordance with the appended claims and any equivalents thereof.

WHAT IS CLAIMED IS:

1. A thermal interface comprising:
a first surface;
a second surface; and
5 a plurality of elongate fibers in the space between and in contact with at least one of said first surface and said second surface, wherein at least some of said fibers have a cross sectional diameter of less than approximately 1 micron.
2. The thermal interface of Claim 1, wherein said fibers having a cross sectional diameter of less than about 1 micron are bonded to a portion of other fibers
10 having a cross sectional diameter of greater than approximately 3 microns.
3. The thermal interface of Claim 2, wherein said portion comprises the tips.
4. The thermal interface of Claim 1, wherein at least some of said fibers comprise multi-walled nanotubes.
- 15 5. The thermal interface of Claim 1, wherein said fibers extend from at least one side of a metal membrane.
6. The thermal interface of Claim 5, wherein said fibers extend from both sides of said metal membrane.
7. A method of making a thermal interface comprising attaching whiskers
20 having a diameter of less than about 1 micron to the tips of fibers having a diameter of greater than about 3 microns.
8. The method of Claim 7, wherein the whiskers and the fibers both comprise carbon.
9. A method of transferring heat away from a heat source comprising:
25 transferring heat from said heat source to a first plurality of fibers having cross sectional diameters of less than about 1 micron;
transferring heat from said first plurality of fibers to a second plurality of fibers having cross sectional diameters of more than about 3 microns; and
transferring heat from said second plurality of fibers to a heat sink.

30

10. A thermally conductive gasket comprising:

a plurality of fibers having first and second ends, said fibers being predominantly aligned such that said first ends are positioned adjacent to a first face of said gasket and such that said second ends are positioned adjacent to a second face of said gasket;

a material located predominantly proximate to said first ends, said material improving heat transfer between said first ends and a device in contact with said first face.

11. The gasket of Claim 10, wherein said fibers have a diameter of more than about 3 microns, and wherein said material comprises a plurality of nanofibrils having a diameter of less than about 1 micron.

12. The gasket of Claim 10, wherein said material comprises a material which has a melting point between approximately 30 degrees C and 100 degrees C.

13. The gasket of Claim 12, wherein said material comprises a material which has a melting point between approximately 40 degrees C and 70 degrees C.

14. A method of enhancing the performance of a thermally conductive gasket made from a plurality of predominantly aligned carbon fibers having diameters of more than approximately 3 microns, said method comprising placing a plurality of nanofibrils having diameters of approximately 1 micron proximate to at least some tips of said predominantly aligned carbon fibers.

15. The method of Claim 14, wherein at least some of said nanofibrils comprise multi-walled nanotubes.

16. A thermally conductive gasket comprising a central support and a plurality of nanofibrils extending from each major surface thereof, wherein at least some of said nanofibrils have a diameter of less than about 1 micron.

17. The gasket of Claim 16, wherein at least some of said nanofibrils comprise multi-walled nanotubes.

Abstract

A thermal interface includes nanofibrils. The nanofibrils may be attached to a flat base or membrane, or may be attached to the tip portions of larger diameter fibers. The nanofibrils have a diameter of less than about 1 micron, and may advantageously be formed from single walled and/or multi-walled nanotubes.

S:\DOCS\TRA\TRA-3639.DOC
060800

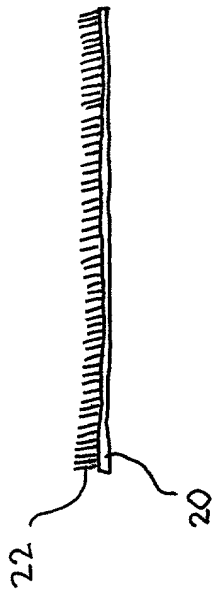


FIG. 1A

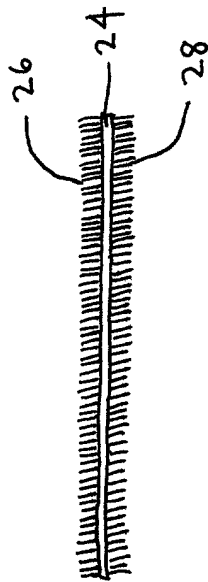


FIG. 1B

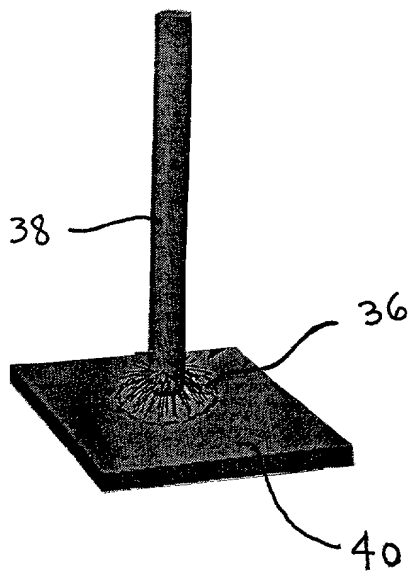


FIG. 2

40

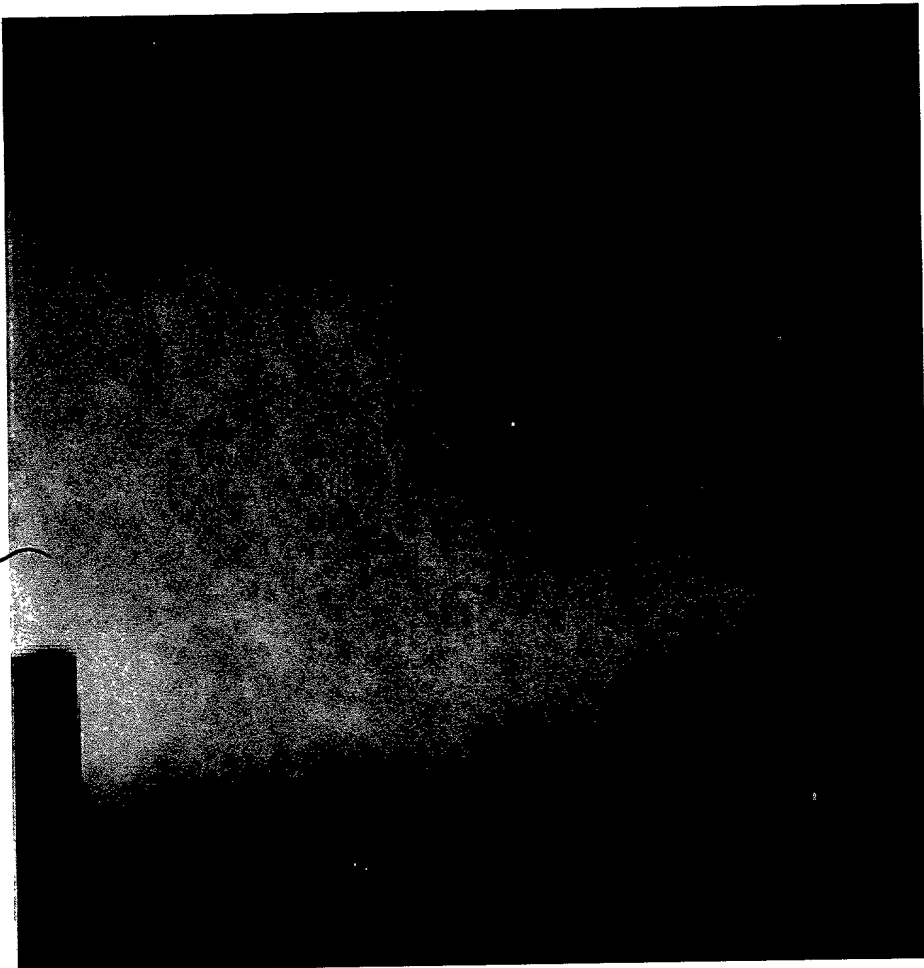


FIG. 4

A high-contrast, black and white photograph showing a dense, chaotic pile of small, light-colored, irregular fragments or shavings against a dark background. The fragments appear to be thin, elongated, and somewhat jagged, resembling wood shavings or small pieces of debris. They are scattered across the frame, creating a textured, almost abstract composition. The lighting is very bright, causing some areas of the fragments to appear completely white, while the background is a deep, solid black.

Fig. 5

A high-contrast, black and white photograph of a single, textured, vertical object, possibly a candle or a piece of wood, set against a dark background. The object has a rough, uneven surface and a pointed tip.

A high-contrast, black and white photograph of a hand holding a small, dark, cylindrical object, possibly a cigarette or a small container, against a dark background. The lighting is dramatic, highlighting the textures of the skin and the object.

FIG. 6B

09092587 061300



FIG. 6C

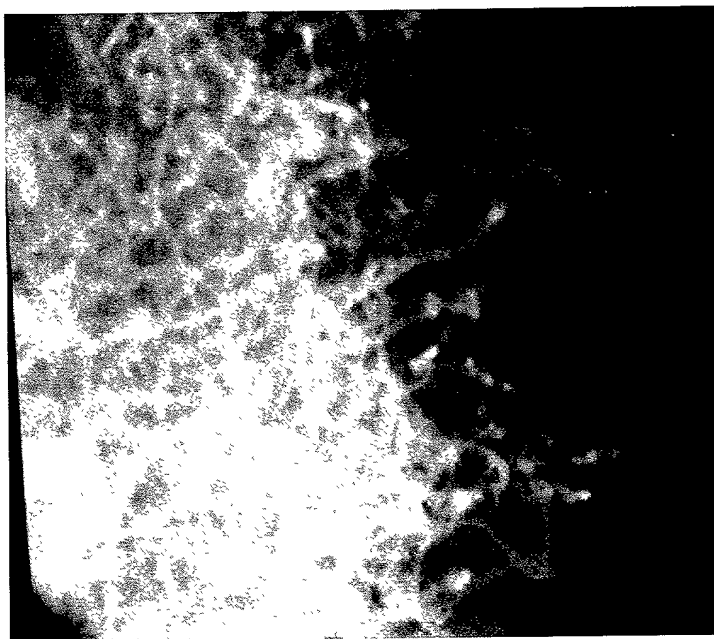


FIG. 6D